BEAMBAR 10-RGBW

DESCRIPTION


LED Narrow Beam Bar, 10x 15W RGBW Osram + Artnet

FEATURES

- This projector is the logical evolution of our POWERPIXEL8-RGB!
- The unit is equipped with 10 extremely effective very narrow 4.5° lenses, in combination with powerful and reliable 15W RGBW-leds.
- Thanks to the included frost filter, this projector is the perfect solution for "close range" applications like wall washing but also great on concert stages, in theaters, discotheques, exhibition booths, ...
- RJ45 Ethernet in/out connections, equipped with automatic bypass function for increased reliability.
- Full support for Art-Net protocol!
- Internal Art-Net node: "Art-Net to DMX-conversion" 1 DMX-universe is available on the DMX-output.
- Excellent built-in programs for wonderful, ever changing, light shows.
- Excellent RGB color consistency while dimming down to 0%
- Completely silent operation, thanks to natural convection cooling system.
- All shows work in standalone, master/slave or can be selected by DMX:
 - Static colors
 - Fading colors
 - Different static chases
 - Different sound activated chases
- Full DMX control with different channel modes, ranging from simple 3CH-mode to 30CH/60CH mode for full RGBW+DIM control of every single pixel.
- RDM-functionality for easy remote setup: DMX addressing, channel mode.
- Backlit alphanumeric 2x 16character LCD-display for easy menu navigation
- Adjustable master dimmer for all standalone functions.
- Selectable lamp behavior: halogen lamp (slow) or led (fast)
- Four dimmer curves: linear, square, inverse square, S-curve
- In case of DMX failure, you can choose between blackout and freeze mode.
- Lock function to avoid unwanted altering of the settings.
- Individual white balance for each pixel for perfect matching of the colors on several projectors.
- Default factory settings + 2 user settings can be saved/loaded.
- Neutrik PowerCON in/outputs: easy daisy chaining of several units.
- Both 3pin & 5pin DMX in/outputs for maximum compatibility
- High efficiency and low power consumption!
- The multifunctional bracket, designed for both floor and truss mounting, is prepared to fix optional omega clamps!





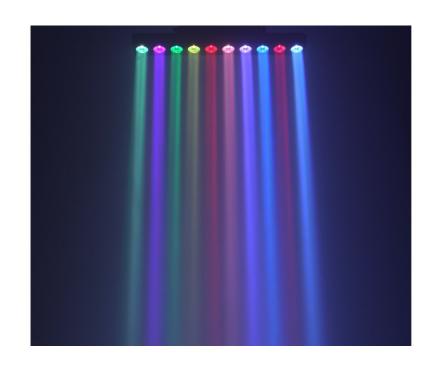



www.briteq-lighting.com | https://www.facebook.com/Briteq

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2017 by BEGLEC NV. All rights reserved.

SPECIFICATIONS

General: Dimensions (cm)

General: Application Architectural, DJ & Club, Stage &

Rental, Theatre 88 x 18.25 x 16 cm

General: Weight (kg) 9.33

General: Powerinput AC 100 - 240V, 50/60Hz

General : Energy LabelNoGeneral : Power consumption W180General : ColorblackGeneral : DisplayLCD

General: Fixation optional standard clamp, optional

omega bracket

General: IP rating indoor
Control: manual No
Control: Master/Slave Yes
Control: DMX M/S No
Control: Standalone

Control : Standalone automatic, sound, fixed

Control : programmable No
Control : upgradable software Yes
Control : maximum DMX channels
Light : lamp socket
Light : lamp
LED

Light : colors Red, Green, Blue, White

Light: mix colors

Light: focus

None

Light: zoom

None

Light: iris

No

Light: min. beam angle (°)

Light: min. refresh rate (kHz)

Light: max. refresh rate (kHz)

1.2

Connections: input

3 pin XLR, 5 pin XLR, powercon,

artnet, rdm

Connections : output3 pin XLR, 5 pin XLR, powercon,

artnet BRITEQ

Brand BRITEQ **EA NCode** 5420025644181

Discontinued No





